KRUPPS DISHWASHER MACHINES

SINCE 1965

100% MADE IN ITALY

CUBE LINE C432H

TYPE	Glasswasher
LINE	CUBE LINE
BASKET	400x400
SIZE	470x535x710h

ADVANCE

UP

Reliability and ease of use: these are the key words of the **CUBE** line. The **UP** control panel with buttons combines practicality and great durability. The simple and extremely efficient electronic card offers the possibility of setting and controlling the rinsing and draining times, the washing and rinsing temperatures and the relative Thermostops, crucial for ensuring excellent washing results. The **ADVANCE** panel (optional) is the real strength of the CUBE line thanks to its 4 washing cycles and one automatic drain cycle (with drain pump installed). On the control panel you can easily view the tank and boiler temperature, the messages of the Self-diagnosis system, the Scheduled Maintenance warning and the intelligent Start button, which changes colour to always display the dishwasher status very easily.

The **C432H** model, available with round basket or with square basket, is suitable for washing cups, saucers and glasses with a clearance of up to 315 mm, using a single 120-second standard cycle in the UP version.

The standard **double electric rinse-aid and detergent dispenser** ensures maximum hygiene at each wash cycle with great savings: the **moulded washing and rinsing arms** ensure reliability and durability. The bodywork is made entirely of **AISI 304 steel** and has been designed with all of the components in the front for **easy technical assistance**. Sturdy and reliable dishwashers to best deal with every moment of your day.

CERTIFIED

ON REQUEST

KRUPPS DISHWASHER MACHINES

SINCE 1965

100% MADE IN ITALY

DISHWASHERS FEATURES	CUBE LINE C432H
Dimensions - (mm) L - P - H	470x535x710h
n° baskets/hour - (+55°C)	30
Height glass max	295mm
Ø height plate max	315mm
Tank heating element - Tank capacity	2,6kW - 17lt
Boiler heating element - Boiler capacity	2,5kW - 3,2lt
Washing pump	0,19kW / 0,25Hp
Total power input / Current	2,79kW / 16A
Standard input voltage	230V 50Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC
STANDARD EQUIPMENT	
Saucer holder 12 pieces	1
Cutlery insert	1
Basket for glasses dim.400x400x150mm	2
OPTION	
UNIKO touch display with IKLOUD Wi-Fi control	-
Booster pump kit 0,5Hp	●
Drain pump kit 40W	●
Reverse osmosis system	-
Inclined basket for wine glasses dim.400x400x170mm	●
Kit 4 Stainless steel feet 50-70mm	●
ADVANCE display	●

● INSTALLABLE ACCESSORY , - NOT INSTALLABLE ACCESSORY

C432H

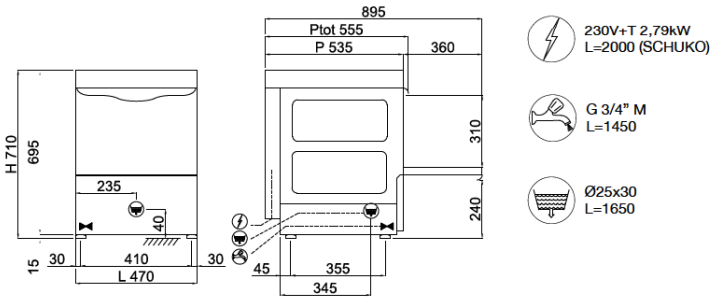

CERTIFIED

ON REQUEST